
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura ICF to the new fourth-floor storey only - 6in XR35 external walls + 6in Standard stair-core and separating walls, 7 courses on the steel ring beam - pre-cut by BuildEase, stock forms and accessories by the distributor. The existing building, steelwork, floor, roof, partitions and finishes are shown or assumed in good faith only and must be checked by the relevant professional; the structural engineer to design the ring beam, transfer steels and the walls.

QUOTATION - NOT FOR CONSTRUCTION

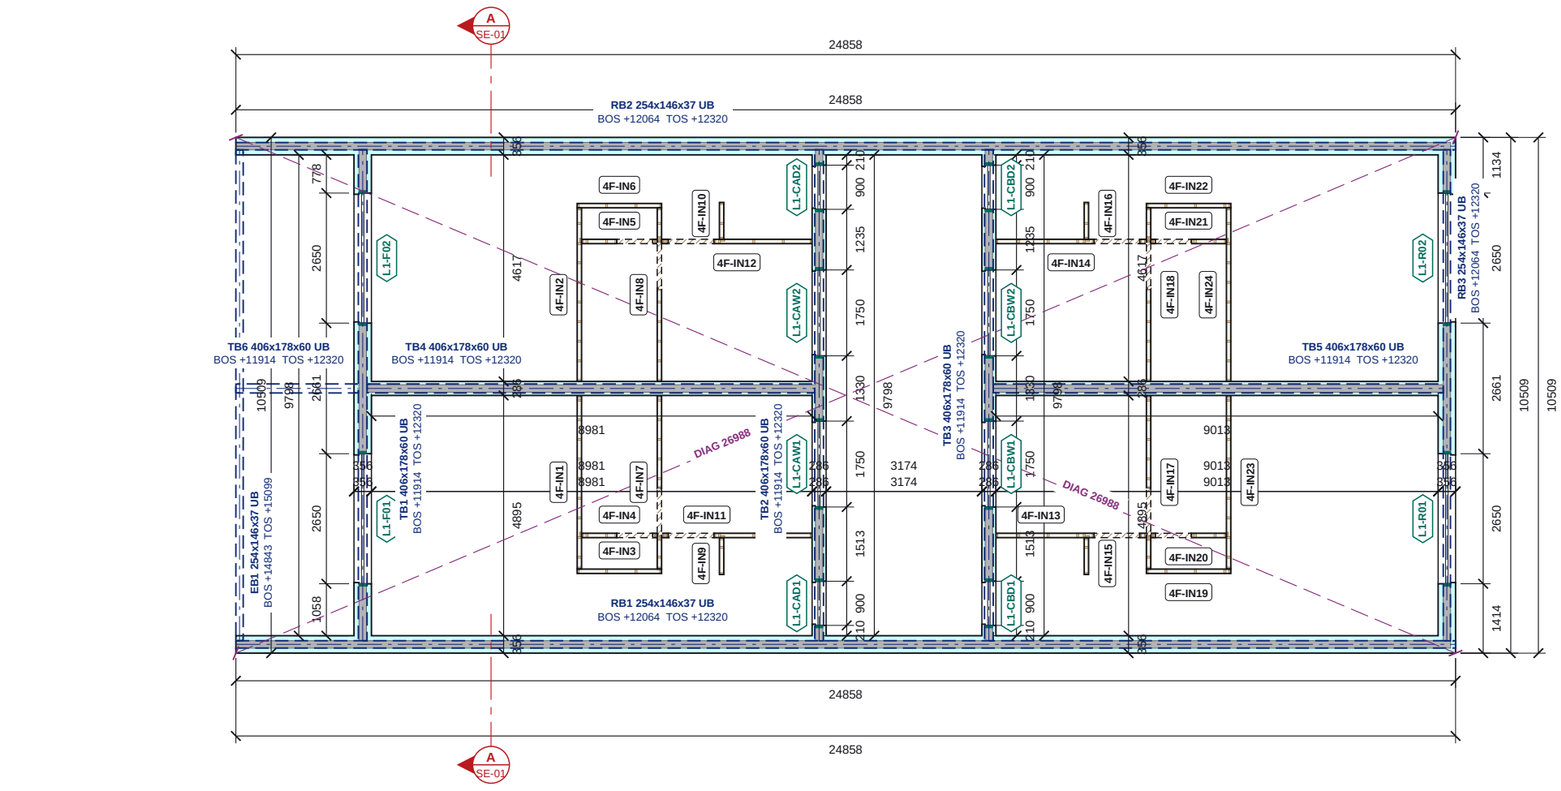

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Load-bearing masonry wall (context)
- Timber frame partition panel, studs cut at plan level
- Panel joint
- Door opening in a timber partition (hatched through the door, head over dashed)
- Steel over (dashed), marked
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

FOURTH FLOOR ICF PLAN

Scale 1:125 @ A3 | Plan cut at +13800

0 1 2 3 4 5m

FOURTH FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-F01	2650	2500	+12320	+14820	-
L1-R01	2650	2500	+12320	+14820	-
L1-F02	2650	2500	+12320	+14820	-
L1-R02	2650	2500	+12320	+14820	-
L1-CAD1	900	2100	+12320	+14420	-
L1-CAD2	900	2100	+12320	+14420	-
L1-CAW1	1750	1200	+13220	+14420	-
L1-CAW2	1750	1200	+13220	+14420	-
L1-CBD1	900	2100	+12320	+14420	-
L1-CBD2	900	2100	+12320	+14420	-
L1-CBW1	1750	1200	+13220	+14420	-
L1-CBW2	1750	1200	+13220	+14420	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
EB1	254x146x37 UB S355	+14843	+15099
RB1	254x146x37 UB S355	+12064	+12320
RB2	254x146x37 UB S355	+12064	+12320
RB3	254x146x37 UB S355	+12064	+12320
TB1	406x178x60 UB S355	+11914	+12320
TB2	406x178x60 UB S355	+11914	+12320
TB3	406x178x60 UB S355	+11914	+12320
TB4	406x178x60 UB S355	+11914	+12320
TB5	406x178x60 UB S355	+11914	+12320
TB6	406x178x60 UB S355	+11914	+12320

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6in XR35 / 6in Std (152 core) walls on a steel ring beam at the head of the existing walls; ring beam, transfer steels under the internal ICF walls and the 4F front wall, reinforcement, lintels and the mix for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = rear yard ground (~ +14.92 AOD). ICF base = top of steel ring beam +12,320 (~ +27.24 AOD).
8. From Huw Griffiths Architects HG-24-02-02/03/05/06 (Planning) and JVS roof survey 041/24.
9. Existing building, steel ring beam / transfer steels, floor and roof structure shown indicatively only.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	2 Castle Gardens, Swansea - new fourth-floor storey (4 flats)

DRAWING TITLE

FOURTH FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:125	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-055-GA-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.