
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura ICF to the new fourth-floor storey only - 6in XR35 external walls + 6in Standard stair-core and separating walls, 7 courses on the steel ring beam - pre-cut by BuildEase, stock forms and accessories by the distributor. The existing building, steelwork, floor, roof, partitions and finishes are shown or assumed in good faith only and must be checked by the relevant professional; the structural engineer to design the ring beam, transfer steels and the walls.

QUOTATION - NOT FOR CONSTRUCTION

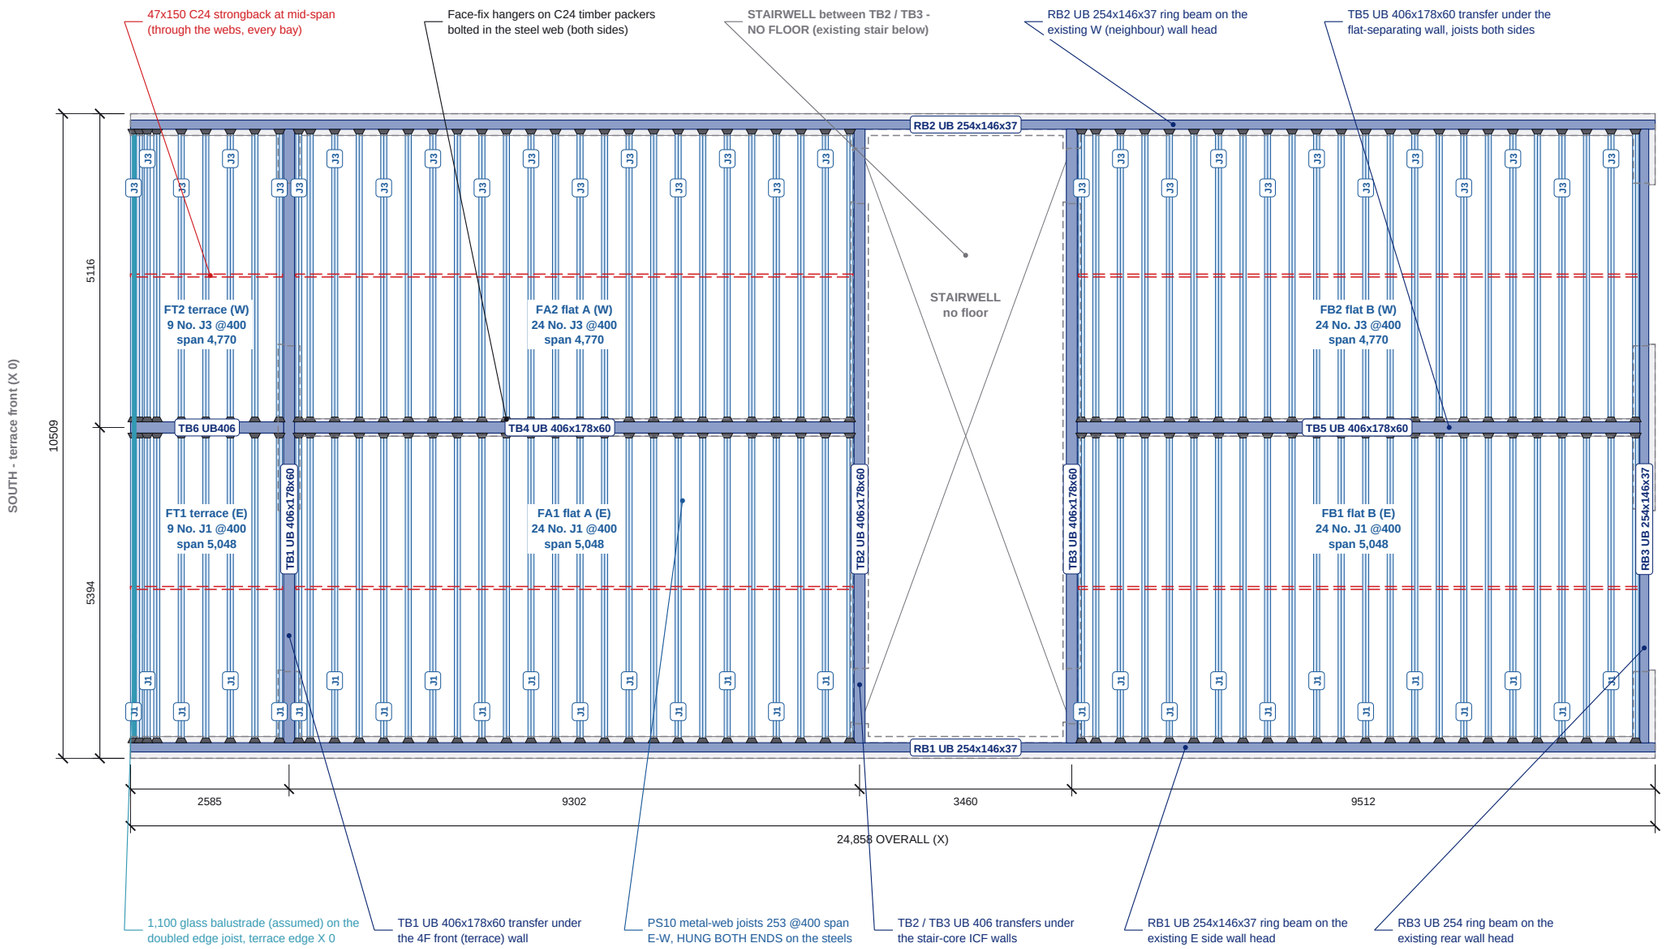

FOURTH FLOOR STRUCTURE PLAN

Scale 1:100 @ A3 | Plan on the joists (deck omitted), ICF walls over dashed (cut at +13,020)

TRUE NORTH = to the rear (+X)

0 1 2 3 4 5m

FOURTH FLOOR SCHEDULES

JOIST SCHEDULE (253 DEEP, @400)

Type	O/A	Bottom	Bearing	Bays	Qty
J1	5,042	5,042	hung both ends	FA1, FB1, FT1	57
J3	4,764	4,764	hung both ends	FA2, FB2, FT2	57
	Total				**114**

O/A = top flange overall; Bottom = bottom flange. Includes 4 No. in the doubled (bolted) terrace edge pairs. Profiles + bearing details on ES26-055-FL-02.

BAYS

Bay	Span	Joists	Strongback at	Deck m2
FA1	5,048	24	2,778	46.0
FA2	4,770	24	7,870	43.4
FB1	5,048	24	2,778	46.2
FB2	4,770	24	7,870	43.6
FT1	5,048	9	2,778	12.6
FT2	4,770	9	7,870	11.9
Total		**114**		**203.6**

FA = flats A (front), FB = flats B (rear), FT = covered terrace; 1 = east, 2 = west. Span = hanger face to hanger face (model Y).

TIMBER, METALWORK, DECK AND GUARDING

Item	Qty
47x150 C24 strongback (No. / run m)	6 / 41.4
Face-fix hanger on the timber packer	228
22 Egger Protect P5 T&G board (No. / m2)	186 / 203.6
1,100 glass balustrade + base shoe + cap rail	9,778 lg

Timber packers in the steel webs are listed with the steels (FL-02).

NOTES

1. 4F FFL +12,342: 22 Egger Protect P5 T&G deck on 253 deep metal-web joists (PS10 equivalent, 97x47 C24 flanges) @400 c/c spanning ACROSS the building (E-W) in bays FA1 / FA2 (flats A), FB1 / FB2 (flats B) and FT1 / FT2 (covered terrace). Joist top +12,320 = top of the steel ring beam = ICF base; underside +12,067.
2. Every joist is HUNG BOTH ENDS on face-fix hangers off C24 timber packers bolted in the steel webs (M12 @300 staggered; 73 x 219 in the UB254, 88 x 360 in the UB406) - never top-flange hangers on the steel. 47x150 C24 strongbacks at mid-span of every bay, fixed to the vertical web plates.
3. STEELS INDICATIVE - STRUCTURAL ENGINEER TO DESIGN: RB1 / RB2 / RB3 UB 254x146x37 ring beam on the existing wall heads (bearings, padstones, ties to the existing masonry); TB1-TB6 UB 406x178x60 transfers under the new 4F front, stair-core and flat-separating ICF walls. 5,263 kg at this level (schedule on ES26-055-FL-02).
4. COVERED TERRACE (FT1 / FT2, X 0 to TB1): doubled edge joist (bolted pair) on the terrace edge X 0 and a 1,100 toughened laminated glass balustrade in an aluminium base shoe fixed through the deck into the doubled joist (ASSUMED, by others; 9,778 long). Terrace finish / falls by others.
5. STAIRWELL between the stair-core transfers TB2 / TB3: NO FLOOR (open to the existing stair below).
6. Joist supplier to design and confirm the floor; for pricing only. Levels mm above the rear yard ground (Z 0 ~ +14.92 AOD).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	2 Castle Gardens, Swansea - new fourth-floor storey (4 flats)

DRAWING TITLE

FOURTH FLOOR STRUCTURE

Metal-web joists hung off the steel ring beam + transfers, terrace edge, stairwell

SCALE	SIZE	DATE
1:100	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-055-FL-01	-

Do not scale. All dimensions in mm. Check all dimensions on site.