
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura ICF to the new fourth-floor storey only - 6in XR35 external walls + 6in Standard stair-core and separating walls, 7 courses on the steel ring beam - pre-cut by BuildEase, stock forms and accessories by the distributor. The existing building, steelwork, floor, roof, partitions and finishes are shown or assumed in good faith only and must be checked by the relevant professional; the structural engineer to design the ring beam, transfer steels and the walls.

QUOTATION - NOT FOR CONSTRUCTION

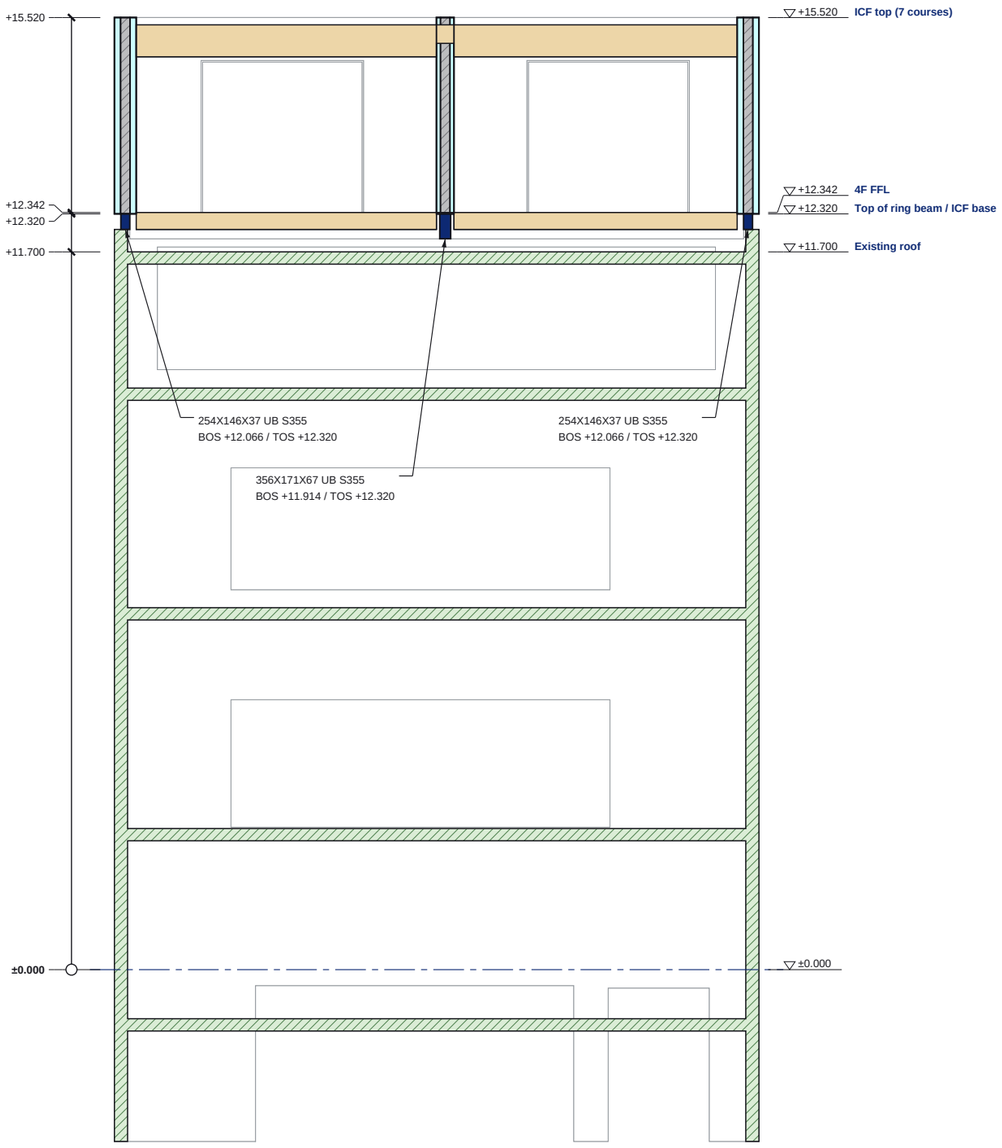

SECTION A-A

Scale 1:100 @ A3 | Looking west; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Timber (cut)
Masonry wall (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL
GF FFL	±0.000
Existing roof	+11.700
Top of ring beam / ICF base	+12.320
4F FFL	+12.342
ICF top (7 courses)	+15.520

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
-	254x146x37 UB S355	+12.066	+12.320
-	254x146x37 UB S355	+12.066	+12.320
-	356x171x67 UB S355	+11.914	+12.320

SECTION KEY

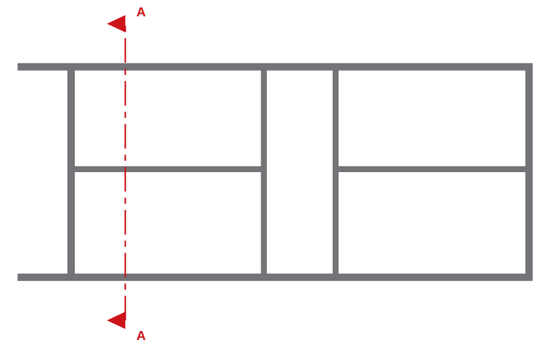

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design issued. 6in XR35 / 6in Std (152 core) walls on a steel ring beam at the head of the existing walls; ring beam, transfer steels under the internal ICF walls and the 4F front wall, reinforcement, lintels and the mix for the engineer.
4. Steel marks, BOS / TOS: rev -. See ES26-055-GA-01 / EL-01 / EL-02 in the approval drawings pack.
5. Datum: 0 = rear yard ground (~ +14.92 AOD). ICF base = top of steel ring beam +12,320 (~ +27.24 AOD).
6. From Huw Griffiths Architects HG-24-02-02/03/05/06 (Planning) and JVS roof survey 041/24.
7. Existing building, steel ring beam / transfer steels, floor and roof structure shown indicatively only.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	2 Castle Gardens, Swansea - new fourth-floor storey (4 flats)

DRAWING TITLE
SECTION A-A
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:100	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-055-SE-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.